


Polys P-1b 500W

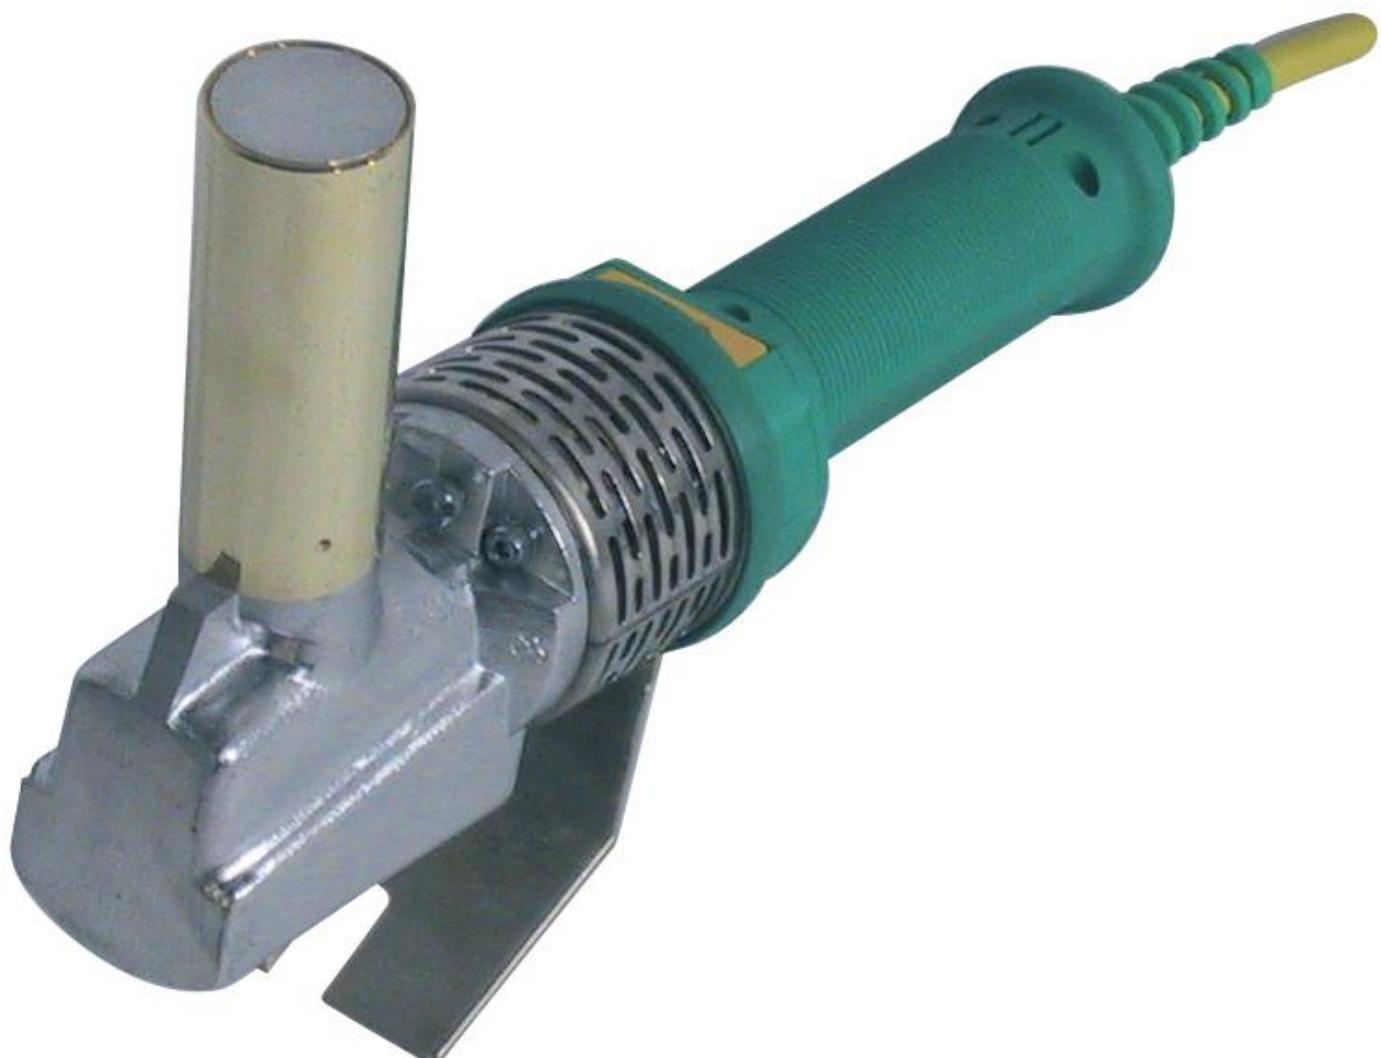

DYTRON s.r.o.
Toužimská 943/24a, 197 00 Praha 9 - Kbely, Czech
Tel.: +420-2-66190011-3, fax: +420-2-66190038
E-mail: sales@dytron.eu
<http://www.dytron.eu>

| | | |
|-----|----------------------------|---|
| 1. | | 3 |
| 2. | | 3 |
| 3. | | 4 |
| 4. | | 4 |
| 4.1 | Polys P-1b 500W SOLO | 4 |
| 4.2 | SP-1b 500W HOBBY | 4 |
| 5. | | 5 |
| 5.1 | | 5 |
| 5.2 | | 5 |
| 5.3 | | 5 |
| 5.4 | | 5 |
| 5.5 | | 5 |
| 5.6 | DYNO | 5 |
| 6. | | 6 |
| 6.1 | | 6 |
| 6.2 | | 6 |
| 6.3 | | 6 |
| 7. | | 7 |
| 8. | | 7 |
| 9. | | 8 |

1.

DYTRON –

2.

Polys P-1a 500W

$\varnothing 32$

« »


2

(. . . 6.1).



180–280°C

1–5,

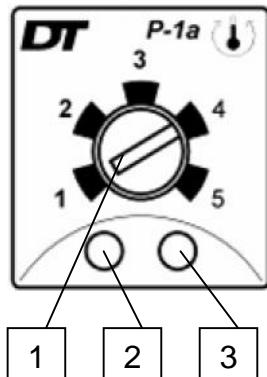

1...175 – 195°C
2...195 – 215°C
3...215 – 235°C
4...235 – 255°C
5...255 – 280°C

1 –
2 –
3 –

()

5-7° ,

5-7°

320°

3.

- : 16–40
- : 500
- : 220 , 50
- : ±7°C
- : 1,3

4.

Polys P-1a 650W



4.1 Polys P-1b 500W SOLO

- (6-) 4
- /
- 1,6

4.2

SP-1b 500W HOBBY

- 6- () 4
- DYNO Ø42
- 20, 25, 32 40
- () /
- 6,6



5.

5.1



DIN.

500

16-63

Plate100

Ø16-40

Ø90

(6-) 4



5.2

-4 -1.



5.3

-4 -1.



5.4



5.5

-4 -1.



5.6

DYNO

40



6.

6.1

()



6.2

(2)


(3)

(1)

180–280°C

- 1...175 – 195°C
- 2...195 – 215°C
- 3...215 – 235°C
- 4...235 – 255°C
- 5...255 – 280°C

5

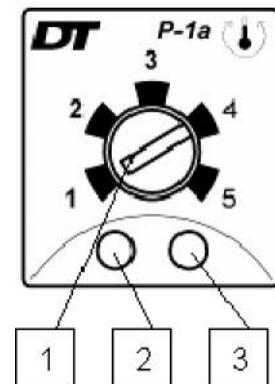

PN10,

260°C.

– 260°C.

(3)

5-10

(1),

(3)

6.3

().

()

| | 16 | 20 | 25 | 32 | 40 |
|---|-----------|-----------|-----------|-----------|-----------|
| , | 5 | 5 | 7 | 8 | 12 |
| , | 4 | 4 | 4 | 6 | 6 |
| , | 6 | 6 | 10 | 10 | 20 |
| , | 2 | 2 | 2 | 4 | 4 |

3 (PPRC).

/

7.

DYTRON s.r.o.

No.22/97 Sb.

, 168, 169, 170 and 173/97.

- , , ,
- / , , ,
- / | , , ,
- , , , ,
- ! , , , ,

331600,

3-

1

3-

8.

DYTRON.

9.

1. , 24

2. , ,

3. , :

3.1. , :
DYTRON
DYTRON.

3.2. - , , , ,

3.3. , , , ,

6

3.4. , , , ,

4.

5.

5.1. , .3.1.,

5.2.

5.3.

5.4. ,

5.5.

5.6.

5.7.

6.

7. , , , ,

.1.