

Polys P-4a 850W TraceWeld



:

1	3
2	3
3	4
4	4
4.1	Polys P-4a 850W TraceWeld SOLO	4
4.2	SP-4a 850W TraceWeld MINI	4
4.3	SP-4a 850W TraceWeld PROFI.....	4
5	5
5.1	5
5.2	5
5.3	5
5.4	5
5.5	5
5.6	5
6	6
6.1	6
6.2	6
6.3	6
6.4	7
7	7
8	8
9	8

1

DYTRON –


2

Polys P-4a 850W TraceWeld



« »
2

TraceWeld –

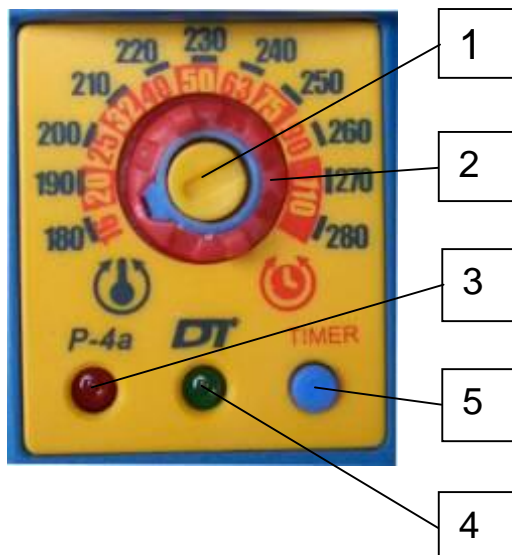

180-280°
(1).

(2).

Ø16).

TIMER (5).

(3)

(4)

3

:
:
:
: :
: :
: : ±1,5°C
: : 1,6

4

Polys P-4a 850W TraceWeld

:



4.1 Polys P-4a 850W TraceWeld SOLO

- (6-) 6
- /
- 2,0

4.2

SP-4a 850W TraceWeld MINI

- (6-) 6
- 20, 25 32 (
-)
- DYNO
- /
- MINI
- 6,0



4.3

SP-4a 850W TraceWeld PROFI

- (6-) 6
- 16,20,25,32,40,50 63
-)
- (
- DYNO
- /
- 7,7

5

5.1



DIN.

16-125

Polys P-4a 850W TraceWeld
(6-) 6

16-75

5.2



-4 -1.



5.3



-4 -1.

5.4




5.5



-4 -1.

5.6

40

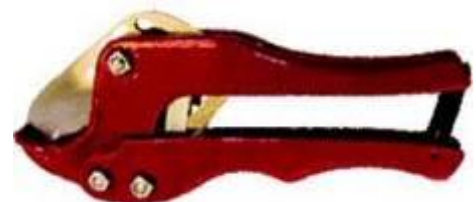

6



6.1



- 6.2
- 1
 - 2
 - 3
 - 4
 - 5

()

(3)

(4)

260°C.

PN10,

260,

(1)

!

260°C.

(4)

5-10

(1),

(4)

6.3

(.).

()

3

	16	20	25	32	40	50	63	75
	5	5	7	8	12	12	24	30
	4	4	4	6	6	6	8	8
	6	6	10	10	20	20	30	30
	2	2	2	4	4	4	6	6

3 (PPRC).


/

6.4

TraceWeld

(2)

(- 32).

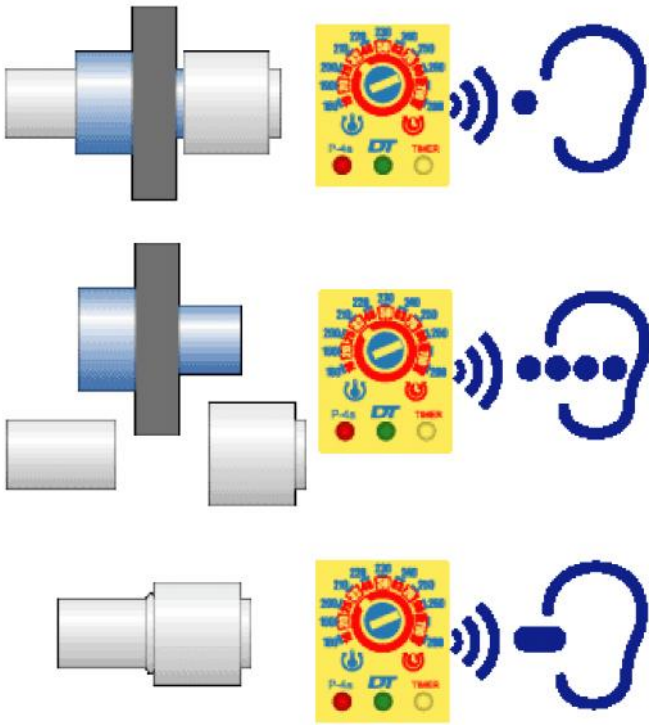

TIMER (5).

7

DYTRON s.r.o.
No.22/97 Sb. 168, 169, 170 and 173/97.

.
.
.
. /
. / !
. !
. !
. !
. !
. !
. !
. !
. !

331600,

1

3-

3-

8

DYTRON.

9

- 1.
- 2.
- 3.
- 3.1.
- 3.2.
- 3.3.
- 3.4.

24

DYTRON
DYTRON.

6

- 4.
- 5.
- 5.1.
- 5.2.
- 5.3.
- 5.4.
- 5.5.
- 5.6.
- 5.7.
- 6.
- 7.

.3.1.,

.1.