

Polys P-4a 650W TraceWeld



:

DYTRON s.r.o.
Toužimská 943/24a, 197 00 Praha 9 - Kbely, Czech
Tel.: +420-2-66190011-3, fax: +420-2-66190038
E-mail: sales@dytron.eu
<http://www.dytron.eu>

1	3
2	3
3	4
4	4
4.1	Polys P-4a 650W TraceWeld SOLO	4
4.2	SP-4a 650W TraceWeld MINI	4
4.3	SP-4a 650W TraceWeld STANDARD	4
4.4	SP-4a 650W TraceWeld PROFI	4
5	5
5.1	5
5.2	5
5.3	5
5.4	5
5.5	5
5.6	5
6	6
6.1	6
6.2	6
6.3	6
6.4	7
7	7
8	8
9	8

1

DYTRON –

2

Polys P-4a 650W

Ø32


« »

3

(. . . 6.1).



TraceWeld –

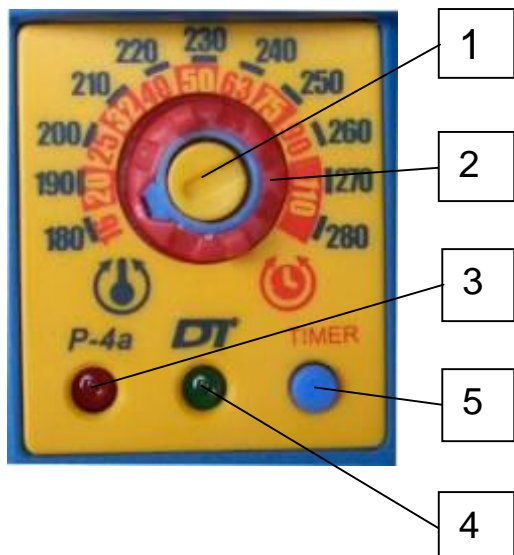

180-280°
(1).

(2).

Ø16).

TIMER (5).

(3)

(4)

3

:
 :
 : : 16-63
 : : 650
 : : 220 , 50
 : : :
 : : ±1,5°C
 : : 1,3

4

Polys P-4a 650W TraceWeld

:



4.1 Polys P-4a 650W TraceWeld SOLO

•
 • (6-) 4
 • /
 •
 1,6

4.2

SP-4a 650W TraceWeld MINI

•
 • (20, 25 6- 32) 4
 •)
 • DYNO
 • /
 • MINI
 •
 5,9



4.3

SP-4a 650W TraceWeld STANDARD

•
 • (20, 25, 32, 40, 50 6- 63) 4
 •)
 • DYNO
 • /
 •
 7,5

4.4

SP-4a 650W TraceWeld PROFI

•
 • (16,20,25,32,40,50,63 6-) 4
 •) Plate100
 • (DYNO
 • /
 •
 8,0



5

5.1

DIN.



16-63

Plate100

Ø90

) 4

6-

5.2



-4 -1.



5.3



-4 -1.

5.4



5.5



-4 -1.

5.6

40



6

6.1



6.2



- 1
- 2
- 3
- 4
- 5

DN 40	+10
DN 50	+10
DN 63	+15
Plate 100	+10

260°C.

PN10,

260,

(1)

- 260°C.

5-10

(4)

(1),

(4)

6.3

3

	16	20	25	32	40	50	63
	5	5	7	8	12	12	24
	4	4	4	6	6	6	8
	6	6	10	10	20	20	30
	2	2	2	4	4	4	6


3 (PPRC).

6.4

TraceWeld

(2)

32).

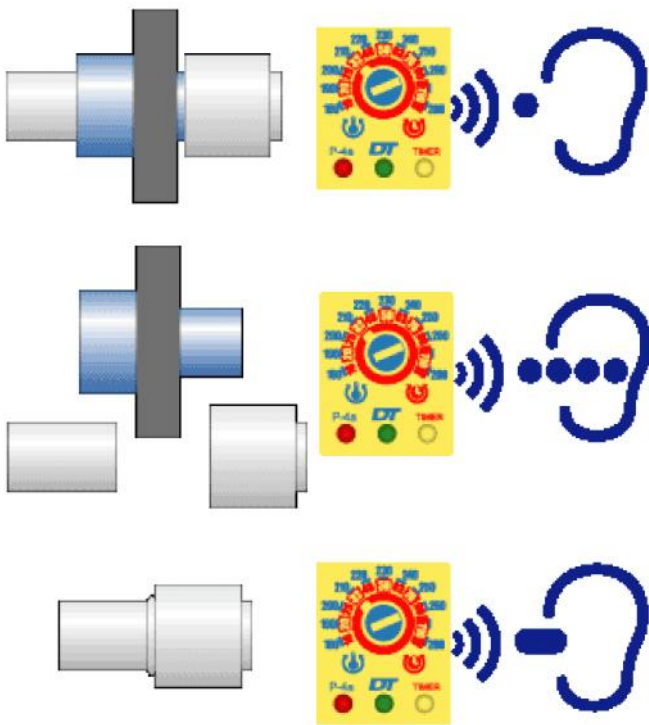

TIMER (5).

7

DYTRON s.r.o.

No.22/97 Sb.

168, 169, 170 and 173/97.

-
-
-
-
-
-
-
-
-
-
-
-



• !
• 331600, 1
, 3- 3-
•
•

8

DYTRON.

9

1.		4.
2.	24	5.
3.		5.1.
3.1.		.3.1.,
	DYTRON DYTRON.	5.2.
3.2.		5.3.
		5.4.
		5.5.
		5.6.
		5.7.
3.3.		6.
3.4.	6	7.
		.1.